

Planning for Attacker Entrapment in Adversarial Settings

Brittany Cates,¹ Anagha Kulkarni,² Sarath Sreedharan¹

¹ Department of Computer Science, Colorado State University, CO, USA

² Invitae Corporation, San Francisco, CA, USA

brittany.cates@colostate.edu, anagha.kulkarni@invitae.com, sarath.sreedharan@colostate.edu

Abstract

In this paper, we propose a planning framework to generate a defense strategy against an attacker who is working in an environment where a defender can operate without the attacker’s knowledge. The objective of the defender is to covertly guide the attacker to a trap state from which the attacker cannot achieve their goal. Further, the defender is constrained to achieve its goal within K number of steps, where K is calculated as a pessimistic lower bound within which the attacker is unlikely to suspect a threat in the environment. Such a defense strategy is highly useful in real-world systems like honeypots or honeynets, where an unsuspecting attacker interacts with a simulated production system while assuming it is the actual production system. Typically, the interaction between an attacker and a defender is captured using game theoretic frameworks. Our problem formulation allows us to capture it as a much simpler infinite-horizon discounted MDP, in which the optimal policy for the MDP gives the defender’s strategy against the actions of the attacker. Through empirical evaluation, we show the merits of our problem formulation.

1 Introduction

Adversarial planning is a topic that has received significant attention in recent years (Masters, Kirley, and Smith 2021; Bernardini, Fagnani, and Franco 2020; Chakraborti et al. 2019). It has been considered in a diverse range of settings, from simple path planning (Masters and Sardina 2017) to more realistic cybersecurity problems (Letchford and Vorobeychik 2013). These works have not only provided the community with an opportunity to showcase the effectiveness of modern planning tools, but to develop new planning paradigms better suited to handling such cases (for example, the Stackelberg planning formulation (Speicher et al. 2018)). An underlying theme in many of the above-mentioned examples is that the problem is framed as essentially game-theoretic in nature. Through this paper, we hope to introduce a new class of adversarial planning problems of practical import, which lends itself to a simple and intuitive planning formulation.

In this paper, we introduce the *attacker entrapment problem*, which involves a hidden defender manipulating its environment to undermine an attack. We will conceptualize this as a problem of leading an attacker, oblivious to the defender’s presence, to predetermined trap states. The effec-

tiveness of the defender relies on its ability to keep its presence hidden from the attacker. As long as the attacker is unaware of the defender’s existence, the defender can rely on basic planning techniques to identify the defender’s strategies.

While this may seem like an unrealistic setting, it is in fact a widely studied problem in the domain of cybersecurity. Specifically, honeypots are a strategy often used in real-world networks to address attacker entrapment problems. As the name suggests, honeypots are used to lure and trap black hat attackers by simulating a real production system that the attackers can penetrate and interact with. Honeypots can be used as a defense mechanism to divert the attacker from a real system and trap them, or they can be used to study an attacker’s strategies in order to develop stronger security mechanisms.

It is worth noting that current strategies for developing honeypots are completely offline processes. The network designer is tasked with organizing a system so that honeypots corresponding to attractive targets are placed in a potential attacker’s path. From the perspective of an attacker entrapment problem, this represents a mechanism or environment design solution (Keren, Gal, and Karpas 2021). We instead propose a novel, active solution, which uses a planner to adapt to potential actions taken by the attacker.

We will capture the planning problem of the defender as a Markov Decision Process (MDP). While concealing its presence, the defender will use the attacker’s beliefs about the system architecture to predict the attacker’s strategy and lead the attacker to a predetermined trap state. It will mask its own actions using the attacker’s beliefs about the stochasticity of the domain. Unbeknownst to the attacker, the defender can control the outcome of certain attacker actions. For example, the defender could decide what password should be returned to the attacker in response to an SQL injection attack, or when considering the security of a physical space, which automatic door to open when the attacker reaches a room. By carefully selecting the outcomes, the defender can lead the attacker to a trap state or failing that, lead them to a state with lower utilities.

In addition to introducing this problem framework and a solution technique, we will introduce a way to calculate a budget for defender actions. We will show how such a budget allows the defender to manipulate outcomes with-

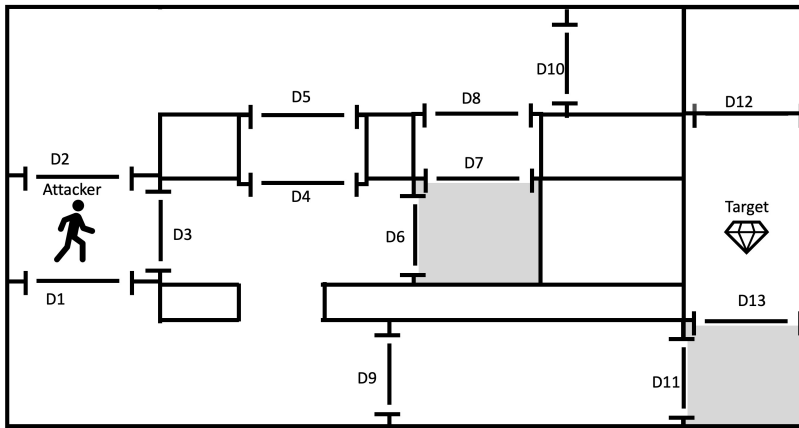


Figure 1: A diagram illustrating the running example. Here we see an attacker trying to break into a specific room to steal an object. The defender’s goal is to get the attacker to enter one of the trap rooms highlighted in grey by controlling which of the automatic doors open when the attacker enters a room.

out arousing the attacker’s suspicion that the environment is being controlled. We will evaluate our solution on several traditional MDP benchmarks and present the computational characteristics of our method.

To summarize, the contributions of this paper includes:

1. Identification and formalization of the attacker entrapment problem.
2. Formulation of a solution to attacker entrapment problem as an MDP planning problem.
3. Development of search based methods to identify a lower-bound on the defender budget that is guaranteed to avoid detection from the attacker.
4. Evaluation of the effectiveness of solution methods in reducing the attacker values, on a number of standard MDP benchmarks.

2 Motivating Example

As a running example, we consider a simple scenario involving the security of a small showroom. The attacker takes the form of a thief, who is attempting to steal a valuable diamond from the showroom. The thief has access to a map of the showroom and knows the exact location of the valuable item. The only source of stochasticity within this domain is a set of automatic doors spread throughout the showroom. The attacker is under the impression that whenever they enter a room with multiple doors, one of the doors will open with uniform probability. However, unbeknownst to the attacker, there exists an automated defender agent that can control which doors will open. The objective of the defender is to choose the doors which will lead the attacker into one of the trap states highlighted in grey. While the attacker knows these rooms exist, they do not know that these are trap states.

Let Figure 1 correspond to the layout of the showroom and the current position of the attacker. The defender could choose to open door D3. If the attacker is a rational agent, they would simply follow the corridor until they enter the trap state. However, this may not be the case. They may

wander into the lower corridor instead. The defender would need to adapt by opening door D11, leading the attacker to another trap state. The defender will have to keep track of where the attacker may be going and what they may be doing, so it can respond in turn and achieve the desired outcome. In addition to directing the attacker into one of the trap states, the defender may also have other considerations. For example, some of these hallways might be lined with expensive items that the attacker could damage. To avert such costly risks, the defender can force the attacker to use paths which minimize the potential damage.

3 Background

We capture the planning problem as an infinite horizon discounted Markov Decision Process or MDP (Puterman 1990). Keeping with standard notations, we will represent this MDP as a tuple of the form $\mathcal{M} = \langle S, A, T, R, \gamma, S_0 \rangle$, where S is the set of states, A is the set of actions, $T : S \times A \times S \rightarrow [0, 1]$ is the transition function, $R : S \times A \times S \rightarrow \mathbb{R}$ is the reward function, $\gamma \in [0, 1)$ is the discount factor and S_0 the initial state for the task. The solution concept used in this class of MDPs corresponds to stationary deterministic policies, henceforth referred to simply as policies. Each policy π corresponds to a function, i.e., $\pi : S \rightarrow A$, that associates an action with each possible state. The value of a given policy π , $V^\pi : S \rightarrow \mathbb{R}$, captures the expected discounted sum of rewards obtained by executing the given policy from a state. Similarly, a Q function $Q^\pi : S \times A \rightarrow \mathbb{R}$, captures the expected discounted sum of rewards obtained by executing a specific action in the given state and then following the policy π . A policy is said to be optimal for \mathcal{M} (denoted as π^*) if there exists no other policy π' and state $s \in S$, such that $V^{\pi'}(s) > V^{\pi^*}(s)$. We will denote the value function corresponding to the optimal policy, using the notation V^* (we will similarly denote the optimal Q function using the notation Q^*). We will use the term trajectory to refer to a sequence of states and actions (denoted as $\tau = \langle s_0, a_0, \dots, s_i \rangle$). We will use the notation $P(\tau|\mathcal{M})$, to

capture the likelihood of a trace τ occurring under a given model \mathcal{M} , where we define the probability recursively as

$$P(\tau|\mathcal{M}) = T(s_0, a_0, s_1) \times P(\langle s_1, a_1, \dots, s_i \rangle | \mathcal{M})$$

In this paper, we will associate a different MDP with both the attacker and the defender, so we differentiate the two MDPs and their components using the superscript \mathcal{A} and \mathcal{D}

4 Our Approach

At the heart of our approach lies the interaction between two agents, an attacker (\mathcal{A}) and a hidden defender (\mathcal{D}). Each agent has a model of the problem that they believe they are solving. The attacker starts with an infinite horizon discounted MDP of the form $\mathcal{M}^{\mathcal{A}} = \langle S^{\mathcal{A}}, A^{\mathcal{A}}, T^{\mathcal{A}}, R^{\mathcal{A}}, \gamma^{\mathcal{A}}, S_0^{\mathcal{A}} \rangle$, where $S^{\mathcal{A}}$ are the set of states that the attacker ascribes to task, $A^{\mathcal{A}}$ is the set of actions the attacker can perform, $T^{\mathcal{A}}$ is the attacker’s belief about how the task may evolve in response to the attacker’s actions, and finally, $R^{\mathcal{A}}$ and $\gamma^{\mathcal{A}}$ represent the attacker’s internal reward function and discounting. To simplify the formulation, we will assume that the attacker reward is always a non-negative value. As discussed, this may be a purposefully distorted version that the defender may have leaked to the outside world. We will denote the value function calculated from this model as $\mathcal{V}^{\mathcal{A}}$ and denote the optimal value as $\mathcal{V}^{\mathcal{A}*}$ (we will similarly use $\mathcal{Q}^{\mathcal{A}}$ for the Q value). In the above example, the attacker’s states consist of the various positions the attacker can be in and the actions correspond to those for moving around the showroom and finally stealing the diamond when the attacker is in the final room.

One piece of information that the defender does not have access to is the potential policy that the attacker might follow. While the defender might not be able to infer the exact policy, the defender can still generate a distribution over possible attacker action from the model. In particular, the attacker’s decision-making can be modeled using a noisy-rational model (Jeon, Milli, and Dragan 2020). This is generally a very conservative model that still allows probabilities for non-optimal actions and has the additional advantage of being a psychologically feasible model and thus able to model cases where we might be dealing with a human attacker. For example, the use of such noisy-rational model would allow us to capture the possibility that the attacker may wander from the optimal path in the example provided in Figure 1. In particular, we will define the probability of action selection to be

$$P(a|s) \propto e^{\kappa \times \mathcal{Q}^{\mathcal{A}*}(s,a)}, \text{ Where } s \in S^{\mathcal{A}} \text{ } a \in A^{\mathcal{A}}$$

Effectively, this corresponds to a probabilistic distribution where higher value actions are given more weight and κ is a parameter that allows us to control how likely the attacker may select a non-optimal action.

While an attacker would try to maximize the expected cumulative reward they receive, the goal of the defender is to lead the attacker to one of the possible trap states, while minimizing the total reward the attacker may receive (after all, the attacker’s reward may correspond to cases where they

could be destroying or generally disrupting the operations on the target environment). The defender has access to two types of actions. The first is a single noop action wherein the defender does not alter the environment, allowing the attacker to execute its chosen action. In the second case, the defender chooses which of the potential outcomes of an attacker’s action should be applied to the environment, which in our running example corresponds to deciding which of the doors next to the attacker should open.

Furthermore, we will place a limit on the number of times the defender gets to select a specific outcome. In addition to placing limits on what the defender can do, it also reflects the simple fact that if the defender keeps choosing a specific outcome for a particular attacker action in a state, it may lead to the attacker being suspicious that they may be incorrect about the model. In our motivating example, consider the starting position for the attacker. There are three potential doors next to the attacker and per the defender’s policy it chooses to open door D3. Now if the attacker decides to just stay in that room, they would expect one of the doors to again open in the next turn. Now let’s assume that the defender keeps opening the same door, regardless of how many times the attacker chooses to stay in the room. Even if the attacker chalks up the first few instances to the randomness of the environment, they may start doubting their knowledge about the environment if the same outcome keeps getting selected. Such change in beliefs could end up affecting the attacker’s behavior, which in turn could reduce the effectiveness of the method.

Thus, we will limit the defender’s actions to the first K steps. Section 4.1 will provide a more formal description of this phenomena and how exactly we can calculate a pessimistic lower bound on K . With these component definitions in place, we are now ready to define our central problem as follows:

Definition 1. *For a given attacker operating using a model of task $\mathcal{M}^{\mathcal{A}}$, in an environment with a set of trap states S_T where the attacker receives 0 reward, an attacker entrapment problem of budget K corresponds to the problem of the defender selecting a sequence of K actions (either NOOP or outcome-selection actions), that would result in minimal cumulative reward for the attacker.*

Our primary argument in this paper would be that given this setting, we can encode the optimal attacker entrapment problem as another MDP. Solutions to this MDP will automatically devise a policy for the defender that will look at the actions taken by the attacker and decide how the outcomes could be shaped to get the best possible result from the defender’s point of view. This new MDP would again take the form of an infinite horizon discounted MDP. However, now the state space consists of the underlying state (same as the one observed by the attacker), the action being followed by the attacker and the remaining budget. As discussed the actions involve a noop action and a set of actions that can choose which of the outcomes to manifest. Each action (even noop) will also lead to a decrease in the budget. The attacker action component of the state is determined by the likelihood of the attacker selecting that action in that state (defined per

P^A). All states where the budget hits zero and the ones that are trap states are treated as absorbing states. Now in terms of the reward function, for every non-absorbing state the reward corresponds to the negative of the reward received by the attacker. For absorbing states, the defender receives zero reward for all trap states and will receive the negative of the optimal value for the attacker model. This means that the system will try to drive the state to one of the trap states while trying to pass through low-reward states for the attacker. Failing that, the objective would be to reach a state with the minimal value for the attacker. Again all the defender actions are limited by the budget.

More formally, the defender model is given as

$$\mathcal{M}_{(S_T, K)}^D = \langle S^D, A^D, T^D, R^D, \gamma^D, S_0^D \rangle,$$

where $S_T \subseteq S^A$ is the set of trap states. Here the states are given as $S^D = S^A \times A^A \times I^K$, such that $I^K \subseteq \mathbb{Z}$, and actions as $A^D = \{noop\} \cup a_s^D | s \in S^A$. For every state $(s, a, k) \in S^D$ where $s \notin S_T$ and $k \neq 0$, the transition probabilities is defined as,

$$T^D((s, a, k), noop, (s', a', k')) = \begin{cases} T^A(s, a, s') \times P^A(a' | s') & \text{if } k' = k - 1 \\ 0 & \text{otherwise} \end{cases}$$

For the non-noop actions the transition probabilities is defined as

$$T^D((s, a, k), a_{\hat{s}}^D, (s', a', k')) = \begin{cases} 1 & \text{if } k' = k - 1 \text{ and } \hat{s} = s' \\ 0 & \text{otherwise} \end{cases}$$

For an absorbing state all transition probabilities would be zero. Now for the reward, for all non-absorbing state $R^D((s, a, k)) = -1 \times R^A(s)$, while for a state $s \in S_T$, $R^D((s, a, k)) = 0$ for all k and for all states where $k = 0$ and the state is not a trap state $R^D((s, a, 0)) = -1 \times Q^{A^*}(s, a)$. By allowing the reward value to be equal to the negative of the optimal Q value of the agent, we allow for the fact that once the defender stops acting in the world, the attacker is free to achieve the maximum possible value. This adds an additional incentive on the defender end to drive the attacker to lower value states if the defender is unable to lead the attacker to a trap state. The discount factor is kept the same as that of the attacker. One could also associate a cost with each action defender chooses and restrict the non-noop actions to some subset of states, but we will skip those to keep the formulation simple.

It is worth noting that the above formulation chooses to include budget as part of it's state rather than considering a finite horizon MDP. This is because under a finite horizon MDP, the reward associated with a state is not dependent on the time step. On the other hand, in this case we want to set the reward to be equal to negative of the attacker's Q value in states where the defender's budget is zero. It is unclear, how we can easily capture this using finite horizon MDPs.

It is also worth noting that depending on the scenarios, the ability of the defender to determine the outcome might be restricted to some set of states or actions. Or there might be some cost associated with enforcing some specific outcome. The above formulation can easily be modified to capture such consideration. However, we will go with this less

restricted and simpler setting to allow for a cleaner formulation and to potentially derive guarantees on possible defender behaviors. In particular, we can use this formulation to establish a relationship between the optimal value function of the defender MDP and the attacker MDP.

Proposition 1. For any given state $s \in S^A$, the optimal value of any corresponding state (s, a, k) , is given as $|\mathcal{V}^{D^*}((s, a, k))| \leq Q^{A^*}(s, a)$, for all attacker actions a and current budget value k .

Proof. We can easily show this relation through induction, by proving a stronger relation, namely $\mathcal{V}^{D^*}((s, a, k)) \geq -1 \times Q^{A^*}(s, a)$. This is equivalent to stating that $-1 \times \mathcal{V}^{D^*}((s, a, k)) \leq Q^{A^*}(s, a)$ and since $\mathcal{V}^{D^*}(s, a) \leq 0$ (a result of the assumption about the original R^A), the relation $|\mathcal{V}^{D^*}((s, a, k))| \leq Q^{A^*}(s, a)$ holds when you consider the absolute values. The relation $\mathcal{V}^{D^*}((s, a, k)) \geq -1 \times Q^{A^*}(s, a)$ trivially holds when $k = 0$. Now assuming that the relation holds for any state with budget $k = i$, let us consider the value of a state for budget $k = i + 1$. Following the Bellman equations the value will be defined as

$$\begin{aligned} \mathcal{V}^{D^*}((s, a, i + 1)) &= \\ &R^D((s, a, i + 1)) + \\ &\max_{a_D} \left(\sum_{(s', a', i)} (T^D((s, a, i + 1)), a_D, (s', a', i)) \times \right. \\ &\quad \left. \mathcal{V}^{D^*}((s', a', i)) \right) \end{aligned}$$

Now we know that the relation holds for states with budget i thus $\mathcal{V}^{D^*}((s', a', i)) \geq -1 \times Q^{A^*}((s', a')) \geq -1 \times \mathcal{V}^{A^*}((s', a'))$, thus

$$\begin{aligned} \mathcal{V}^{D^*}((s, a, i + 1)) &\geq R^D((s, a, i + 1)) + \\ \max_{a_D} \left(\sum_{(s', a', i)} (T^D((s, a, i + 1)), a_D, (s', a', i)) \times -1 \times \mathcal{V}^{A^*}(s') \right) \end{aligned}$$

Now we have two possible candidates for the a_D with the maximum value. Either it's a deterministic selection of an outcome or it's a noop action. If it's the former, the Bellman operator would select the state with the lowest \mathcal{V}^{A^*} , say \bar{s} , thus we have

$$\begin{aligned} \mathcal{V}^{D^*}((s, a, i + 1)) &\geq -1 \times (R^A(s) + \mathcal{V}^{A^*}(\bar{s})) \\ &\geq -1 \times Q^{A^*}(s, a) \end{aligned}$$

where,

$$Q^{A^*}(s, a) = R^A(s) + \sum_{\hat{s}} \mathcal{V}^{A^*}(\hat{s})$$

The fact

$$-1 \times (R^A(s) + \mathcal{V}^{A^*}(\bar{s})) \geq -1 \times Q^{A^*}(s, a)$$

follows from the fact that

$$R^A(s) + \mathcal{V}^{A^*}(\bar{s}) \leq Q^{A^*}(s, a)$$

which in turn follows from the fact that the lowest value of \mathcal{V}^{A^*} would be less than the weighted sum of the \mathcal{V}^{A^*} for all

the other reachable state. Thus proving the required relation holds when the action that provides the maximum value is an outcome selection action. In the case, of a noop action, the Bellman equation for $\mathcal{V}^{\mathcal{D}^*}((s, a, i + 1))$ directly maps over to $-1 \times \mathcal{Q}^{\mathcal{A}^*}((s, a))$, as the action results in the same transitions as it would have occurred in the attacker model. This proves the original result. \square

Note that for an attacker starting from a given state s and performing an action a , the expected value the attacker would obtain would be upper bounded by $|\mathcal{V}^{\mathcal{D}^*}((s, a, K))|$. This follows intuitively from the fact that for all non-terminal state, the reward associated with a state in $\mathcal{M}^{\mathcal{D}}$ is just the negative of the reward received by the attacker. For a terminal state, if it is a trap state, the attacker would in fact receive zero reward. If the terminal state corresponds to a state where the budget is zero, then the defender receives the negative of the optimal Q value for the action taken by the attacker. This is an upper bound on the value the attacker could receive from that state onward. Thus the above proposition establishes the fact that an optimal policy derived using the above formulation, will never result in the attacker receiving a higher value. In fact, as we will see in the evaluation section, our method is generally very effective at reducing the total expected value received by the attacker.

4.1 Budget

The formulation discussed before will never generate a state action sequence that is not possible under the model used by the attacker. As such regardless of the choices made by the defender, in theory, the attacker wouldn't be surprised by the outcomes observed. However, our choice to restrict the defender's actions to the first K steps is a reflection of the fact that this would hardly ever be true in practice. A more realistic assumption is that the attacker may in fact maintain some uncertainty about their own beliefs about the environment model. To approximate how the attacker's beliefs about the model may evolve we will assume that the attacker is a Bayesian reasoner, an assumption that would fit well even when the attacker may be human. Under this approximation, the attacker will maintain two hypotheses about the environment, either that the environment model is the same as $\mathcal{M}^{\mathcal{A}}$ or that they do not understand the system dynamics at all. Effectively, the second hypothesis corresponds to a case where the human believes the underlying model could be anything other than the one specified by $\mathcal{M}^{\mathcal{A}}$. This is closely related to problems like new species induction (Zabell 1992) and open-world reasoning (Senator 2019). However, as works like (Sreedharan et al. 2021) have shown one could approximate this by using a high entropy model as the basis for this second hypothesis. In this second hypothesis the human believes that transition to any state is possible from any given state when any action is executed. Keeping with the previous literature we will represent this model as $\mathcal{M}^0 = \langle S^{\mathcal{A}}, A^{\mathcal{A}}, T^0, R^0, \gamma^{\mathcal{A}} \rangle$, such that for all $s, s' \in S^{\mathcal{A}}$ and $a \in A^{\mathcal{A}}$, we have

$$T(s, a, s') = \frac{1}{|S^{\mathcal{A}}|}$$

Since we are interested in worst case scenarios, we will assume a truly unbiased attacker whose belief about the model is equally distributed across these two hypotheses. Note that assuming that the attacker is an agent that is operating under this uncertainty doesn't shift the policy of the attacker from what was defined in earlier section as under \mathcal{M}^0 all policies are equivalent, as such the attacker actions are determined by $\mathcal{M}^{\mathcal{A}}$.

Now the objective of the defender would be to avoid the attacker from placing more weight on the hypothesis of them being incorrect about the model. If they start believing that they could be wrong about the model before they reach a trap state, they could take corrective or evasive actions. Now one could adopt a belief MDP style formulation (Kaelbling, Littman, and Cassandra 1998), where we track the exact belief of the attacker, however, the setting affords to use the opportunity to leverage more efficient formulations that still guarantee the attacker does not tip the attacker's belief about them being incorrect about the underlying model. In particular, the budget represents in the worst case the minimal number of transitions that can occur from the initial state wherein the attacker's beliefs may tip over to \mathcal{M}^0 . More formally, we can now define the budget K as follows:

Definition 2. For a given pair of attacker models $\mathcal{M}^{\mathcal{A}}$ and \mathcal{M}^0 , the defender action budget is given as K , if

1. There exists a trace $\tau = \langle s_0, a_0, \dots, s_K \rangle$ of length K (i.e., $|\tau| = k$) such that, $s_0 = S_0^{\mathcal{A}}$, $P(\tau|\mathcal{M}^{\mathcal{A}}) > 0$, and $P(\tau|\mathcal{M}^{\mathcal{A}}) < P(\tau|\mathcal{M}^0)$
2. And, there doesn't exist another trace τ' of length less than K that meets the same conditions

That is, K corresponds to the shortest possible trace that is still possible under $\mathcal{M}^{\mathcal{A}}$, which may be better explained by \mathcal{M}^0 than $\mathcal{M}^{\mathcal{A}}$. By restricting the defender's actions to a length less than K the defender would never be able to select a path to a trap state that could potentially tip the beliefs of the attacker (this even includes potential worst-case transitions that could occur in states where the defender chooses to use no-op actions).

Now the question is how does one calculate this budget K . A simple way to do this is to turn it into a uniform-cost search problem. Specifically, we will start the search from the initial state, at any state the search can select one of the many transitions possible from that state, always expanding the prefix with the shortest length and ending the search when we have a trace that is likelier in \mathcal{M}^0 than $\mathcal{M}^{\mathcal{A}}$. There may be cases where such an upper bound may not exist or may be too long for it to be of any practical importance to the defender. So we can stop the search if we know the K is going to be above some prespecified limit. We can find this limit by solving the defender MDP ($\mathcal{M}^{\mathcal{D}}$) without budget restrictions (and changing the reward function so it only reflects the number of steps needed before the attacker reaches a trap state) and looking at the optimal policy. This gives us the expected discounted number of steps the defender would need to get the optimum outcome and if the K is above that limit, then it does not really matter. If we are additionally guaranteed that at least one trap state is reachable from every state in the MDP, we can set the discount factor to 1 to

get a more accurate estimate of the steps.

5 Empirical Evaluation

Our primary focus with these evaluations was to evaluate the computational characteristics of our proposed method on some standard MDP planning benchmarks. We chose some popular variations of a grid world domain to see how well our method performs as we vary the size and trap locations. We considered the following domains.

1. **Gridworld:** This is the basic grid world domain. The agent’s goal is to navigate from a fixed initial state to a goal position. Its path to the goal may be blocked by walls and cells with lava pits. We tested our method on four different instances of grid world, with sizes of 4×4 , 6×6 , 8×8 and 9×9 . For each grid instance, we tested our method five times using traps states generated at different random locations. The stochasticity in this domain is controlled via a slipping probability that causes the agent to move in a different direction with a small probability.
2. **Four Rooms:** A popular variation of the grid world, in which the agent must navigate through different rooms by using the door connecting the rooms. This domain is particularly popular within the context of hierarchical RL literature (Sutton, Precup, and Singh 1999). As in the previous case, we used four instances of sizes 4×4 , 6×6 , 8×8 and 9×9 . Each instance was again tested on five randomly generated trap states. Interestingly, we found that the specific implementation of the four rooms problem generator we used created instances where the attacker could not reach the goal location for both mazes of sizes 4×4 and 8×8 . The source of stochasticity of the domain remains the same as the original grid world.
3. Next, we considered an MDP version of the rock sampling domain introduced by Smith and Simmons (2012). The agent takes the form of a rover that needs to go around collecting good rock samples from various points of the grid. We again consider grids of the same four size and each instance was tested five times on randomly generated traps. The source of stochasticity of the domain remains the same as the original grid world. The original domain had a negative reward for sampling bad rocks, which we skipped for this experiment.
4. Finally, we consider a puddle domain (Boyan and Moore 1994), in which the agent needs to reach a goal state while avoiding water puddles. Our implementation used a fixed map of size 1×1 , but allowed variations in the size of the step being taken by the agent. We looked at step sizes (δ) of 0.2, 0.3, 0.4, and 0.5. Each step size was again tested five times over randomly selected trap positions. The source of stochasticity was again the probability of slipping. In the original task definition, moving through a puddle causes a negative reward. However, to ensure that the agent only receives non-negative value, we added a positive reward for all actions that occur outside the puddle, while actions within the puddle receive zero rewards. While this could change the optimal behavior of the agent, it still remains a viable test domain as the

defender could still use the stochasticity of the domain to lead the agent to specific trap states.

We used value iteration as our planning method, and used the implementation provided by the Simple_RL framework (Abel 2019). We also used the task implementation provided by the framework with minimal changes made to ensure the attacker’s reward was always positive and the source of stochasticity was symmetric across the domains. We used a uniform cost search for the calculation of the defender budget. To keep the budget calculation simple, we kept an upper bound of 15 steps on the defender budget. If the search looked at paths of length higher than 15 steps, the search simply returned 15 as the defender budget. While this places a simple limit on the possible defender budget, ensuring the budget search ends in finite time, one could also calculate task-specific budget limits using the method discussed in Section 4.1.

Table 1 presents a summary of the results. All reported values are averaged across five instances. The slip probability for all instances was kept at 0.5. All experiments were run with a timeout of 30 minutes.

The primary points of comparison are the value obtained by the attacker if no defender were present and the value obtained by the defender. When the defender intervenes, the effective value obtained by the attacker is equal to the absolute value of the defender value. Our method decreases this value in almost every case. The only two instances that do not hold to this pattern are the ones where the attacker value is already zero.

The instances with values equal to 0 are ones in which the defender policy can guarantee that the attacker will be led to a trap state. We see this primarily in the rock sampling domain and the puddle domain. The defender’s ability to induce policies that guarantee the attacker will be trapped depends on multiple factors, including the reachability of the trap state from the attacker’s starting position, the possible policies that may be followed by the attacker, the potential stochasticity in the domain (so the defender can mask its actions), and the budget available to the defender. The domains where we saw more frequent defender policies which guaranteed entrapment were those with fewer obstacles that the attacker could not cross. In the case of the puddle, even the puddle doesn’t prevent the agent from moving through there, but only causes a smaller reward. Similarly, in the case of the rock sampling domain, the agent is free to move through the map.

Another factor we were interested in measuring was the time taken by the defender to produce a policy. In theory, the policy generated by the defender would consider all possible behavior that the attacker could exhibit. In our current formulation, the defender planning time is not a major bottleneck. Yet it is still an interesting question to study, as our method relies on a complex compilation which considerably increases the state space of the problem instance. The results show that, for most cases, the system was able to generate policies within a reasonable amount of time for all domains except Rock Sampling. For Rock sampling our approach timed for grids of sizes 8×8 and 9×9 . However, it is worth noting that the current planning framework we use

Problem Instance		Average Value of the attacker	Average Value of the defender	Average Defender Planning Time (secs)
Task	Instance			
Gridworld	4×4	0.94	-0.32	0.46
	6×6	0.89	-0.43	5.19
	8×8	0.83	-0.33	74.68
	9×9	0.83	-0.24	94.55
Four Rooms	4×4	0	0	0.013
	6×6	0.85	-0.24	21.35
	8×8	0	0	1.085
	9×9	0.78	-0.48	62.51
Rock Sampling	4×4	735.46	0	14.87
	6×6	868.91	0	272.68
	8×8	-	-	-
	9×9	-	-	-
Puddle	$\delta = 0.2$	529.08	0	0.14
	$\delta = 0.3$	534.42	0	0.07
	$\delta = 0.4$	547.72	0	0.04
	$\delta = 0.5$	547.72	0	0.04

Table 1: Empirical evaluation of the proposed algorithm on a number of standard MDP benchmarks)

(i.e., Simple_RL) adds overhead to our approach which may be avoidable in many MDP planning settings. Simple_RL framework focuses on using a generative specification of the task and performs a separate sampling process to create an estimate of the explicit transition function. In cases where the model is given upfront, we could avoid the need to perform such model estimation operations. As expected, for the problems where the planner succeeds we see the time taken increase with the size of the problem. In the case of the puddle domain, it is worth noting that the effective size of the state space increases with a step size. So the problem corresponding to step size $\delta = 0.2$ corresponds to the largest problem and $\delta = 0.5$ the smallest one. A future goal for the project could be the use of a faster online planner to generate defender strategies.

6 Related Work

Much of the literature (Liu et al. 2021; Masters, Kirley, and Smith 2021; Masters et al. 2020; Masters and Sardina 2017) around deceptive path planning involves an agent obfuscating its goal or path in order to mislead a passive observer. The defender described in our method turns this problem on its head. It is instead, an active observer attempting to deceive another agent. In their survey of agent interpretability, Chakraborti et al. (2019) speculate that a fully active observer could have its “own goals and actions, with the ability to even assist or impede the agent from achieving its goals”. The latter is precisely what is achieved by our defender. To the best of our knowledge, this is the first work to implement an active observer agent whose influence and indeed, the very existence remains unknown to the agent it is deceiving.

Deception (Bell and Whaley 1982) requires that the deceiver must be able to influence the target’s actions and it

must be possible for the target to misread its situation (Davis 2016). Masters and Sardina (2017) makes a distinction between deception which uses simulation, and that which uses dissimulation. Simulation is generally described as “showing the false.” Whereas dissimulation, by contrast, is described as “hiding the real.” Put another way, telling a lie is a form of simulation, while a lie of omission is a form of dissimulation. The defender uses only dissimulation. It does not explicitly convey false information, such as convincing the attacker that the target is in a different location. It simply allows the attacker to maintain the false belief that the environment is not being controlled by an unseen adversary.

The defender can be further classified using the more specific categories of AI deception established by Masters, Kirley, and Smith (2021). It employs a strategy of calculating deception, in which the deceiver possesses more knowledge about the environment and exploits this knowledge to gain advantage over the opponent. In this case, the asymmetry of knowledge is awareness of the defender’s existence and the presence of trap states. Unbeknownst to the attacker, the defender guides the attacker’s movements toward the equally unknown trap states.

It is useful to compare the defender’s method with those of other deceptive path planning agents. Kulkarni, Srivastava, and Kambhampati (2019) chose obfuscated paths for adversarial path planning scenarios by conducting a search over nodes which represent each state along with the belief state of the adversary. Paths were chosen, in part, based on how they affected the adversary’s belief state. Specifically, the planning agent aims to choose a path that does not make its goal known to an adversarial observer (Kulkarni et al. 2018; Keren, Gal, and Karpas 2016; Bernardini, Fagnani, and Franco 2020; Kulkarni, Srivastava, and Kambhampati 2020). Likewise, our defender agent calculates its budget,

the number of actions it can take, by finding the shortest path to a trap state which does not violate the attacker’s model of the environment’s rules.

7 Conclusion and Discussion

The primary contribution of this paper has been the introduction of the *attacker entrapment problem*, in which an attack is undermined by a covert defender. Both agents, each represented using a Markov Decision Process, select actions which maximize their value. The defender maximizes value by leading the attacker to choose actions that minimize its own value, ideally ending in a trap. By only choosing actions that do not alert the attacker to its presence, the defender is able to exploit its opponent’s ignorance of the environment, thereby thwarting the unwitting interloper.

By demonstrating this interaction in four MDP benchmark domains, we have shown that a defender agent like the one described can effectively reduce the value obtained by an attacker. We have also presented a method for calculating a pessimistic lower bound on the number of intervening actions which a defender can take without altering an attacker’s belief about the environment.

Future iterations of this research could investigate different planning strategies. Our current method calculates every possible state for every possible attacker action, which would be prohibitively slow for a large state space. As a next step, we hope to investigate the utility of online and approximate planners, to make our approach more widely applicable in a variety of adversarial scenarios.

Past works have framed deceptive path planning in terms of an agent deceiving a passive observer (Kulkarni, Srivastava, and Kambhampati 2019; Ornik and Topcu 2018). The observer does not know the agent’s goal or plan, and it must continually update its own beliefs by inferring intent from the opponent’s actions. An interesting problem for future research would be to replace the passive observer in these scenarios with our defender agent. The defender could be modified to maintain an estimation of the attacker’s belief state, which can be updated based on the attacker’s actions. The defender could still conceal its presence, but the ability to handle evolving attacker beliefs would make it more robust if its presence became known. The defender could even make choices that risk violating the attacker’s concept of the environmental rules if doing so would ultimately lead to a more desirable outcome.

Such changes lead us toward a more realistic mental model for potential human attackers in a real-world setting. Another step toward a defender that could contend with a human attacker would be the exploitation of cognitive biases. Though humans often think of themselves as rational beings, they are not purely rational and, in fact, their rationality fails in predictable ways. These predictable failings, called cognitive biases, have been categorized and well-documented in psychological literature. In future research, we plan to determine how common cognitive biases can be represented and detected in planning problems. A defender which could take advantage of these weaknesses would be equipped to deceive an opponent using more clever and subtle strategies.

It is our hope that the concepts we have introduced will provide fruitful avenues for future research. Through this simple example, we have demonstrated the potential utility of a covert defender in adversarial path-planning tasks. We are eager to further investigate this line of research and look forward to the new problems it will lead us to explore.

References

- Abel, D. 2019. `simple_rl`: Reproducible Reinforcement Learning in Python. In *RML@ ICLR*.
- Bell, J. B.; and Whaley, B. 1982. *Cheating: Deception in war & magic, games & sports, sex & religion, business & con games, politics & espionage, art & science*. St Martin’s Press.
- Bernardini, S.; Fagnani, F.; and Franco, S. 2020. An Optimization Approach to Robust Goal Obfuscation. In *Proceedings of the International Conference on Principles of Knowledge Representation and Reasoning*, volume 17, 119–129.
- Boyan, J.; and Moore, A. 1994. Generalization in reinforcement learning: Safely approximating the value function. *Advances in neural information processing systems*, 7.
- Chakraborti, T.; Kulkarni, A.; Sreedharan, S.; Smith, D. E.; and Kambhampati, S. 2019. Explicability? legibility? predictability? transparency? privacy? security? the emerging landscape of interpretable agent behavior. In *Proceedings of the international conference on automated planning and scheduling*, volume 29, 86–96.
- Davis, A. L. 2016. Deception in game theory: a survey and multiobjective model. Technical report, Air Force Institute of Technology Wright-Patterson AFB OH.
- Jeon, H. J.; Milli, S.; and Dragan, A. D. 2020. Reward-rational (implicit) choice: A unifying formalism for reward learning. In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Kaelbling, L. P.; Littman, M. L.; and Cassandra, A. R. 1998. Planning and Acting in Partially Observable Stochastic Domains. *Artif. Intell.*, 101(1-2): 99–134.
- Keren, S.; Gal, A.; and Karpas, E. 2016. Privacy Preserving Plans in Partially Observable Environments. In *IJCAI*, 3170–3176.
- Keren, S.; Gal, A.; and Karpas, E. 2021. Goal recognition design-survey. In *Proceedings of the Twenty-Ninth International Conference on International Joint Conferences on Artificial Intelligence*, 4847–4853.
- Kulkarni, A.; Klenk, M.; Rane, S.; and Soroush, H. 2018. Resource bounded secure goal obfuscation. In *AAAI Fall Symposium on Integrating Planning, Diagnosis and Causal Reasoning*.
- Kulkarni, A.; Srivastava, S.; and Kambhampati, S. 2019. A unified framework for planning in adversarial and cooperative environments. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, 2479–2487.

- Kulkarni, A.; Srivastava, S.; and Kambhampati, S. 2020. Signaling Friends and Head-Faking Enemies Simultaneously: Balancing Goal Obfuscation and Goal Legibility. In *Proceedings of the 19th International Conference on Autonomous Agents and MultiAgent Systems, AAMAS '20*, 1889–1891. Richland, SC: International Foundation for Autonomous Agents and Multiagent Systems. ISBN 9781450375184.
- Letchford, J.; and Vorobeychik, Y. 2013. Optimal interdiction of attack plans. In *AAMAS*, 199–206.
- Liu, Z.; Yang, Y.; Miller, T.; and Masters, P. 2021. Deceptive reinforcement learning for privacy-preserving planning. *arXiv preprint arXiv:2102.03022*.
- Masters, P.; Kirley, M.; and Smith, W. 2021. Extended goal recognition: a planning-based model for strategic deception. In *Proceedings of the 20th International Conference on Autonomous Agents and MultiAgent Systems*, 871–879.
- Masters, P.; and Sardina, S. 2017. Deceptive Path-Planning. In *IJCAI*, 4368–4375.
- Masters, P.; Smith, W.; Sonenberg, L.; and Kirley, M. 2020. Characterising Deception in AI: A Survey. In *Deceptive AI*, 3–16. Springer.
- Ornik; and Topcu. 2018. Deception in Optimal Control. In *56th Annual Allerton Conference on Communication, Control, and Computing*, 821–828.
- Puterman, M. L. 1990. Markov decision processes. *Handbooks in operations research and management science*, 2: 331–434.
- Senator, M. T. 2019. Science of Artificial Intelligence and Learning for Open-world Novelty (SAIL-ON).
- Smith, T.; and Simmons, R. 2012. Heuristic search value iteration for POMDPs. *arXiv preprint arXiv:1207.4166*.
- Speicher, P.; Steinmetz, M.; Backes, M.; Hoffmann, J.; and Künnemann, R. 2018. Stackelberg planning: Towards effective leader-follower state space search. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32.
- Sreedharan, S.; Kulkarni, A.; Smith, D. E.; and Kambhampati, S. 2021. A Unifying Bayesian Formulation of Measures of Interpretability in Human-AI Interaction. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence, IJCAI 2021, Virtual Event / Montreal, Canada, 19-27 August 2021*, 4602–4610. ijcai.org.
- Sutton, R. S.; Precup, D.; and Singh, S. 1999. Between MDPs and semi-MDPs: A framework for temporal abstraction in reinforcement learning. *Artificial intelligence*, 112(1-2): 181–211.
- Zabell, S. L. 1992. Predicting the unpredictable. *Synthese*, 90(2): 205–232.